


Nemi Eco 6000

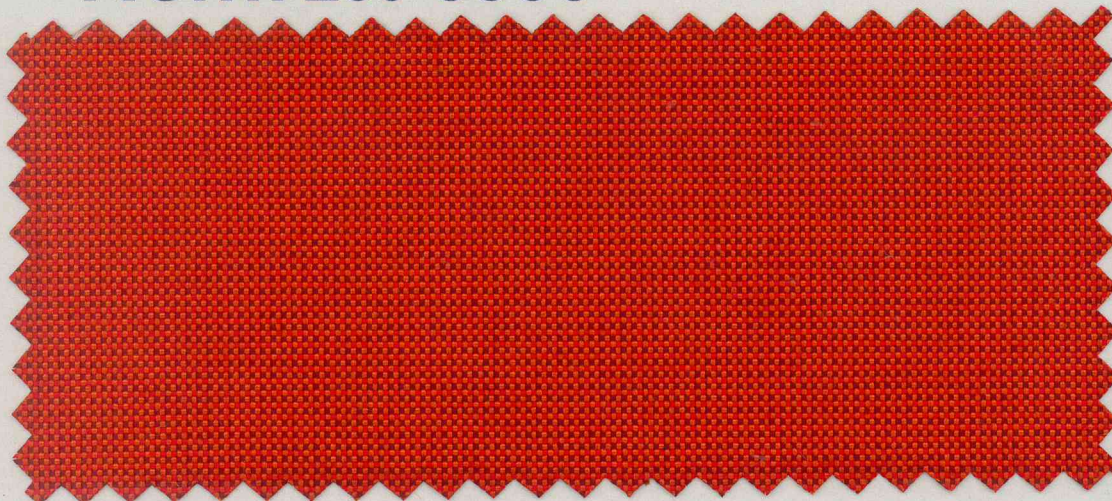

SCHEMA TECNICA

Composizione

100% Poliestere FR - Trevira CS

Peso

gr./mtl. 405 $\pm$ 10%

Altezza

cm. 140 $\pm$ 2%

Lunghezza Pezze

mt. 55 $\pm$ 5%

Abrasione

Test Martindale
UNI EN ISO 12947:2000
60.000 cicli $\pm$ 5.000

Solidità Luce

(Xenotest) UNI EN ISO 105 B02
5 $\pm$ 1

Pulizia

Non spazzolare e usare con regolarità
l'aspirapolvere

Lavaggio



Omologazioni

Le proprietà ignifughe sono
intrinseche nella fibra e non
da trattamenti aggiuntivi.

I Classe 1 **F** M1

D B1 DIN 4102 **E** M1

GB BS 5852 Crib 5 in combination
with CMHR 35 foam

EN 1021 Part. 1-2

 **Azimut serie Nemi Eco 6000**
IMO 688 (17) - IMO 563 (14)
IMO 663 (16)

TECHNICAL DATA

Composition

100% Polyester FR - Trevira CS

Weight

gr./lm. 405 $\pm$ 10%

Width

cm. 140 $\pm$ 2%

Piece Length

lm. 55 $\pm$ 5%

Abrasion Test

Martindale
UNI EN ISO 12947:2000
60.000 turns $\pm$ 5.000

Lightfastness

(Xenotest) UNI EN ISO 105 B02
5 $\pm$ 1

Cleaning

Do not brush and use the
vacuum-cleaner regularly

Washing



Approvals

The flame-retardant properties
are inherent to the fibre and are
not provided by additional
treatments.

I Class 1 **F** M1

D B1 DIN 4102 **E** M1

GB BS 5852 Crib 5 in combination
with CMHR 35 foam

EN 1021 Part. 1-2

 **Azimut type Nemi Eco 6000**
IMO 688 (17) - IMO 563 (14)
IMO 663 (16)